

# INOX IHP

ABOUT USING WATER



## VPL

On/Off Valve  
Oil Actuated



## General features

- High reliability for heavy and continuous duties
- Adjustable switching time
- Stroke regulation till size 11
- Very smooth valve response (no shocking impact)
- Metal-to-metal seal
- Hydraulic solenoid control

## Options

- Proximity switches
- Flanges kit
- Base frame
- Body in stainless steel
- Cartridge version
- Drilling for ANSI or special flanges


## Applications

- Designed to be used as directional valves and shut-off valves


## Technical data

Fluid:	Water and HFA
Function:	NC or NO
Working pressure:	35MPa - 60 MPa
Ambient temperature:	+2°C ÷ +60°C
Feeding:	Hydraulic oil 11 ÷ 12 MPa (temperature +10°C ÷ +30°C)
Electrical input:	24 V dc - 110/220 V
Connections:	SAE6000 drilling up to size 09 INOXIHP drilling from size 10
Materials:	Body in carbon steel, internal parts in stainless steel


Panel version



Line version



## Selection diagram

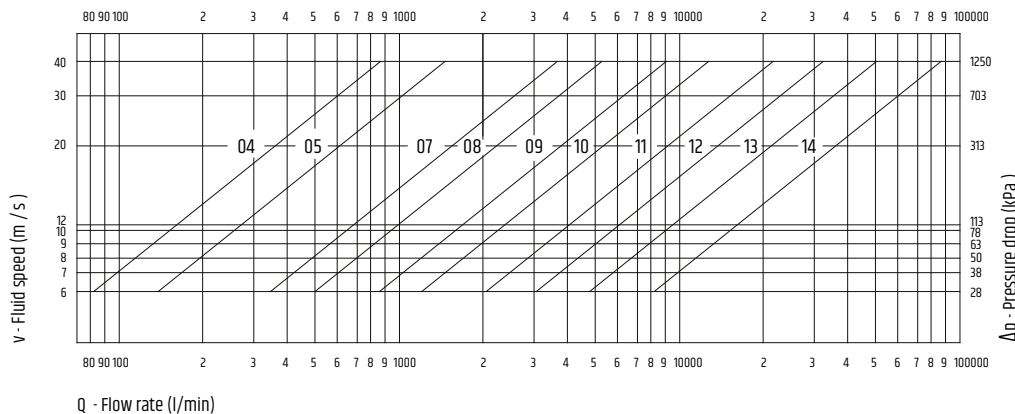

## Valves sizes

INOXIHP	ND	inches
04	20	3/4"
05	25	1"
07	40	1 1/2"
08	50	2"
09	65	2 1/2"
10	80	3"
11	100	4"
12*#	125	5"
13*#	150	6"
14*#	200	8"

\*Only version PN 35 MPa  
#Only for "L" assembly



**EAC** This valve model is EAC certified



**INOXIHP S.r.l.**  
IT - 20834 Nova Milanese (MB) - Via Garibaldi, 89  
Tel: +39 0362 190111 - E-mail: inoxihp@inoxihp.com - inoxihp.com

**INOXIHP**  
ABOUT USING WATER