

INOXIHP
ABOUT USING WATER



PM 350

Reciprocating Horizontal
Triplex Plunger Pumps



PM 350



General features

- Compact dimension
- Forced lubrication system
- Easy maintenance
- Low maintenance costs
- Internal reduction gear
- Self-adjusting seal packing
- Available with carbon steel or stainless steel hydraulic head
- 100% aluminium free

Accessories


- Valve lifter controlled by means of pneumatic solenoid
- Unloading valve
- Over-pressure valve
- HP check valve
- Suction and/or delivery gauge
- Low and high pressure switches
- Manifold groups for suction/delivery
- ATEX Group I Category M2 Certification

Applications

- Emulsion Hydraulic power to drive Longwall systems
- Dust suppression systems on Roof Supports & Coal Shearers


Identification code

see tables on the next page >>>

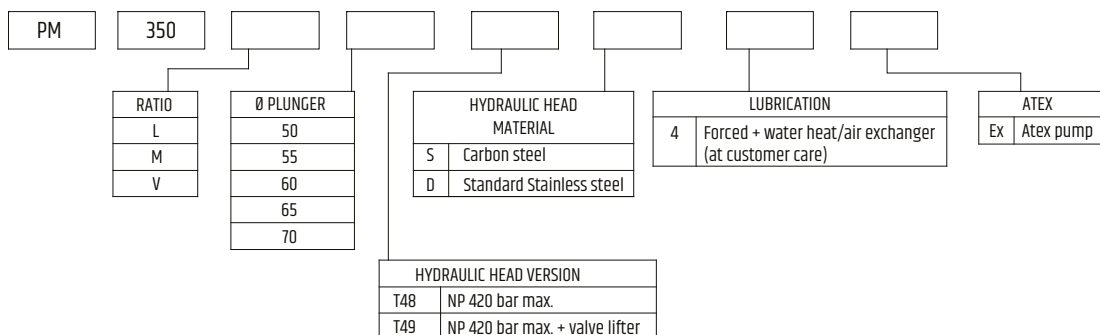


Dimensions

Weight: kg 1090

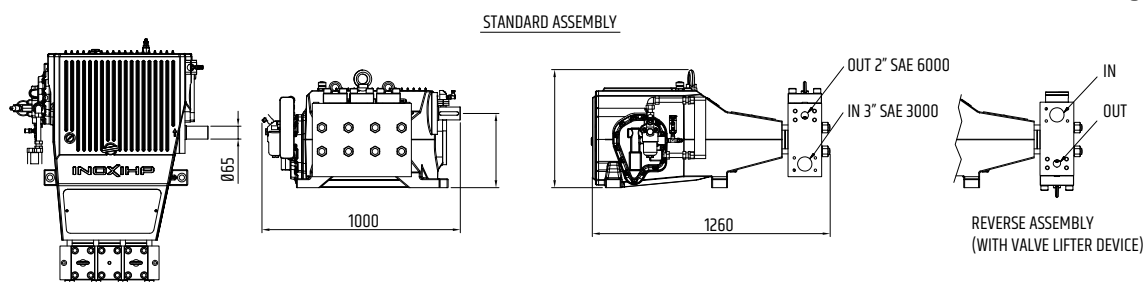


Selection Diagram

PM 350 - 50 Hz 4 POLES ELECTRIC MOTOR (1500 RPM) - MAX ABSORBED POWER 250 kW

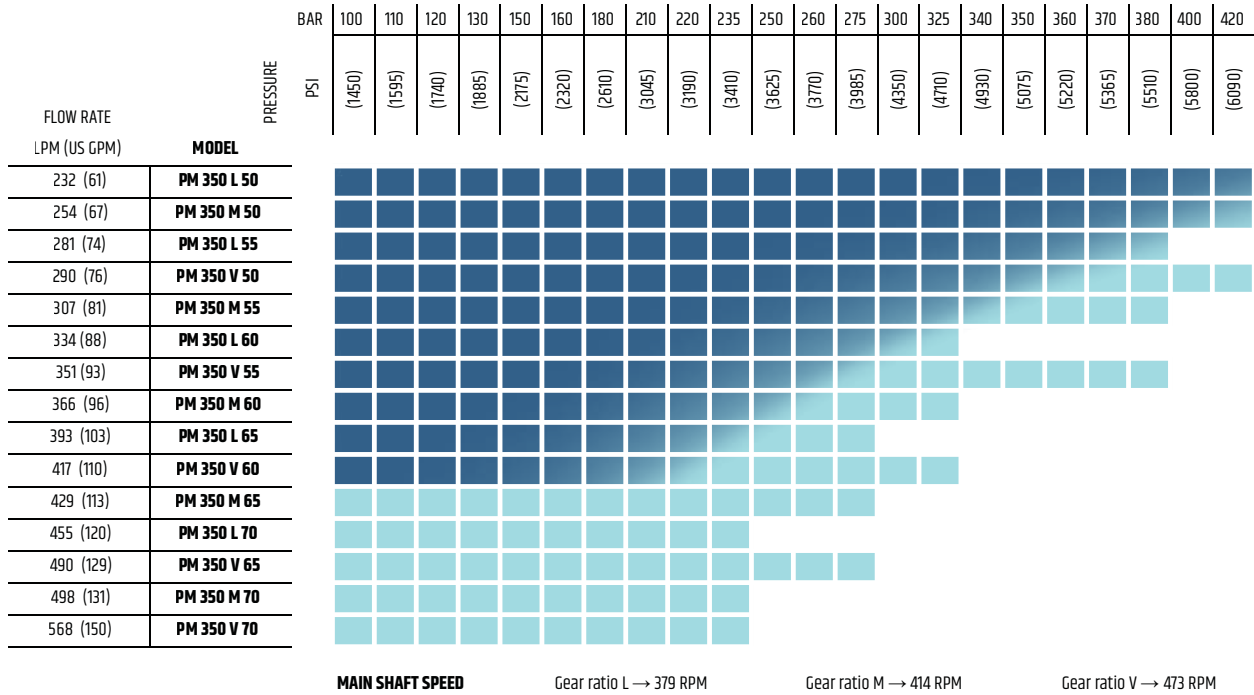

PM 350 - 60 Hz 4 POLES ELECTRIC MOTOR (1800 RPM) - MAX ABSORBED POWER 250 kW

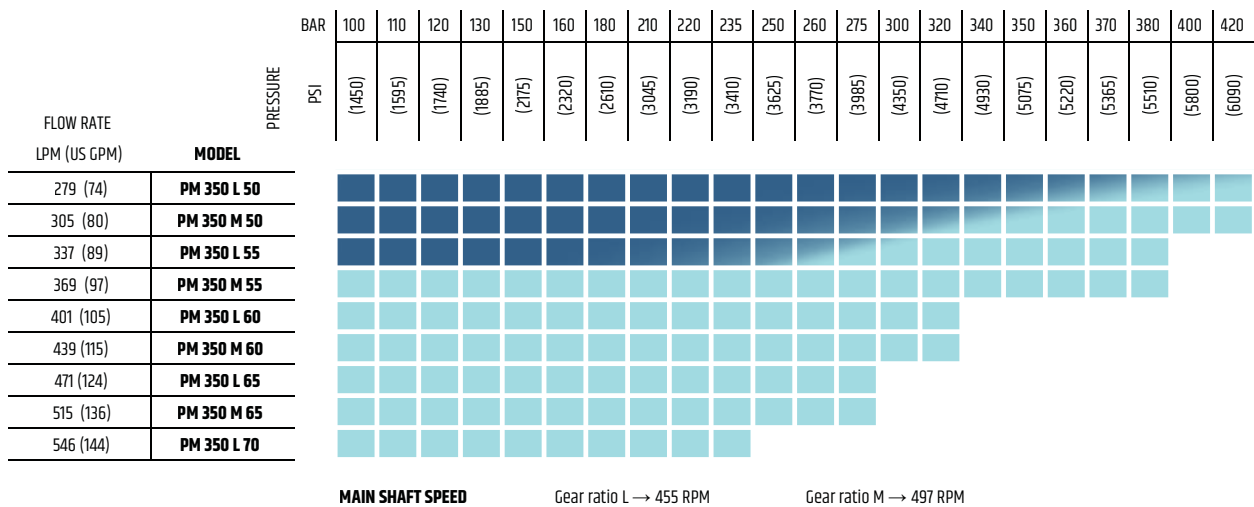

Also covered by smaller pump models T48/T49 Hydraulic head

1 MPa = 10 bar. The pump performances are referred to a volumetric efficiency of 100% and a mechanical efficiency of 89%, with water at 20°C. Input speed range 900-1800 r.p.m. For performances and uses other than the ones listed in this catalogue, please contact INOXIHP technical office for assistance.

Mining Skid

Inoxihp supplies complete skids for underground coal mining (Longwall) for applications such as tunnel roof support, rotating blade cooling (shearer) and dust suppression.

Highly reliable products, also available in ATEX version.



INOXIHP S.r.l.
Viale dell'Industria 11 - 20037 Paderno Dugnano (MI), Italy
Tel: +39 0362 190111 - E-mail: inoxihp@inoxihp.com - inoxihp.com

INOXIHP
ABOUT USING WATER